



Premium Security Products

For
Architectural
Doors


Extension 50 Deadbolt

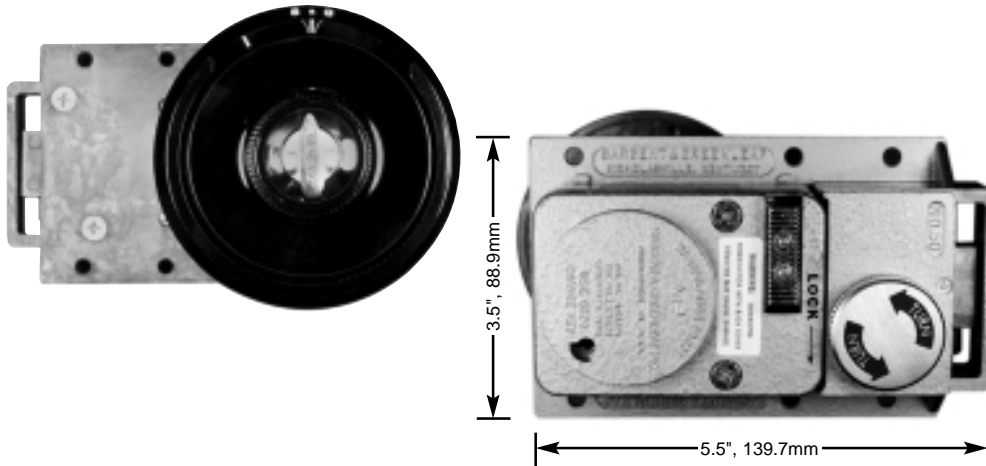


Strikes

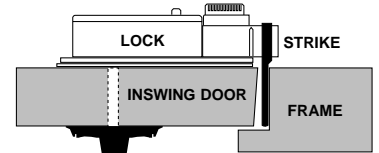


#1 Strike
NSN 5340-01-020-5681
Product No. 8497-001
(strike only)

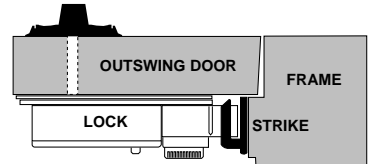

#2 Strike
NSN 5340-01-274-8126
Product No. 8497-002
(strike only)

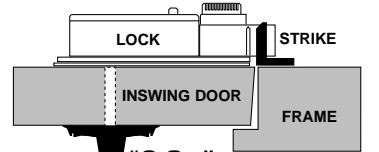

#3 Strike
No National Stock No.
Product No. 8497-003
(strike only)

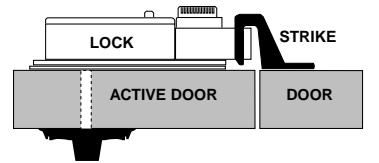

Outswing Double Doors
#9 Strike
NSN 5340-01-217-8922
Product No. 8497-004
(strike only)

Combination Lock	Included Strike	Dial and Ring	National Stock No.	Product No.
8415 Group 1	None	D041/R162		8415-107
8435 Group 1R	None	D041/R162		8435-106
8555 Group 1	None	D054/R162		8555-105
8565 Group 1R	None	D054/R162		8565-105
8415 Group 1	#1	D041/R162	5340-00-671-6607	8415-102
8435 Group 1R	#1	D041/R162	5340-01-095-3512	8435-102
8555 Group 1	#1	D054/R162		8555-101
8565 Group 1R	#1	D054/R162		8565-101
8415 Group 1	#2	D041/R162		8415-103
8435 Group 1R	#2	D041/R162		8435-103
8555 Group 1	#2	D054/R162		8555-102
8565 Group 1R	#2	D054/R162		8565-102
8415 Group 1	#3	D041/R162		8415-104
8435 Group 1R	#3	D041/R162		8435-104
8555 Group 1	#3	D054/R162		8555-103
8565 Group 1R	#3	D054/R162		8565-103
8415 Group 1	#9	D041/R162		8415-105
8435 Group 1R	#9	D041/R162		8435-105
8555 Group 1	#9	D054/R162		8555-104
8565 Group 1R	#9	D054/R162		8565-104

Dials and rings are spy-proof black and white.

Extension 50s have also been referred to as SM-50s and 8470s. All units are designed to be used with an interlocking strike to prevent spreading of the door and frame. Hardened steel pins are incorporated in the locking bolt to deter sawing and increase resistance to forced entry. Every Extension 50 is an automatic locking deadbolt with inside release knob and "dogging" switch to keep the device unlocked when the secured area is occupied. All locks are shipped with hardplate which must be used under the mounting plate to deter forced entry attacks.

All 8400 and 8500 series combination locks have integral relock triggers and are tested by Underwriters Laboratories to ensure a high degree of manipulation resistance. Extension 50s equipped with Group 1 locks have metal wheels, while those with Group 1R locks use acetal resin wheels for x-ray resistance.



Sargent & Greenleaf, Inc.
Over A Century of Security

Copyright 1999, Sargent & Greenleaf, Inc.